

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX-5030-00-UNVE5-35-LG.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 3675
 [ECN] 3734
 [TESTLAB] Tempo LLC
 [ISSUEDATE] 1/14/2019 8:46:29 AM
 [MANUFAC] Tempo LLC
 [LUMCAT] C6RX-5030-00-UNVE5-35-LG
 [LUMINAIRE] Natural anodized aluminum housing with clear glass step lens
 [LAMP] Four (4) white LEDs (3500K) with 50 deg x 30 deg round optics
 [_ELECTRICALS] 120.04 VAC, 0.04 A, 0.9891 PF, 16% ATHD

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	364
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	69
Total Luminaire Watts	5.25
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.78
Spacing Criterion (90-270)	0.44
Spacing Criterion (Diagonal)	0.58
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	0.96 ft
Luminous Height	0.00 ft



LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4199	2880	2352
55	1923	1941	1819
65	1188	1362	1498
75	566	798	1093
85	196	268	433

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX-5030-00-UNVE5-35-LG.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0.0	746.53	746.53	746.53	746.53	746.53	746.53	746.53	746.53	746.53	746.53
2.5	739.62	737.93	736.24	735.81	735.37	734.55	733.73	732.49	731.26	731.57
5.0	727.72	724.98	722.24	718.74	715.24	711.01	706.78	701.15	695.51	690.80
7.5	709.70	705.03	700.35	692.95	685.54	675.44	665.33	653.83	642.32	632.05
10.0	687.89	681.15	674.40	661.27	648.13	631.07	614.01	596.39	578.78	563.03
12.5	658.67	649.22	639.76	620.06	600.37	577.88	555.39	532.39	509.39	489.22
15.0	617.53	605.11	592.70	568.85	544.99	517.63	490.26	463.27	436.28	415.28
17.5	563.63	549.19	534.75	508.09	481.43	452.02	422.59	394.41	366.23	346.48
20.0	496.18	481.17	466.15	439.93	413.71	383.97	354.22	328.34	302.45	284.52
22.5	419.55	405.81	392.06	367.72	343.38	316.40	289.41	267.55	245.69	230.28
25.0	341.60	329.75	317.89	296.65	275.40	253.48	231.55	214.13	196.70	183.77
27.5	266.74	257.97	249.19	232.35	215.50	198.87	182.24	168.72	155.19	144.31
30.0	204.50	198.00	191.49	178.19	164.88	152.72	140.56	130.37	120.17	111.71
32.5	153.34	148.67	143.99	133.89	123.78	115.32	106.86	99.44	92.01	85.73
35.0	113.09	109.95	106.80	99.47	92.12	86.34	80.55	75.09	69.62	65.24
37.5	82.71	80.68	78.64	73.39	68.14	64.13	60.12	56.19	52.25	49.27
40.0	60.58	59.20	57.82	54.17	50.53	47.61	44.69	41.97	39.25	37.25
42.5	44.74	43.77	42.79	40.36	37.92	35.68	33.44	31.64	29.85	28.57
45.0	33.06	32.49	31.91	30.34	28.77	27.26	25.73	24.61	23.47	22.68
47.5	24.75	24.39	24.03	23.20	22.36	21.43	20.50	19.90	19.29	18.84
50.0	18.81	18.68	18.55	18.24	17.92	17.48	17.03	16.79	16.55	16.23
52.5	14.85	14.81	14.77	14.71	14.65	14.52	14.39	14.38	14.38	14.20
55.0	12.28	12.27	12.25	12.22	12.18	12.22	12.24	12.34	12.42	12.40
57.5	10.22	10.23	10.23	10.26	10.29	10.39	10.49	10.55	10.61	10.74
60.0	8.45	8.44	8.43	8.48	8.53	8.66	8.78	8.94	9.10	9.22
62.5	6.88	6.93	6.98	7.00	7.01	7.13	7.25	7.44	7.62	7.77
65.0	5.59	5.63	5.67	5.68	5.69	5.82	5.95	6.11	6.26	6.41
67.5	4.48	4.47	4.45	4.48	4.51	4.60	4.69	4.83	4.96	5.13
70.0	3.21	3.31	3.41	3.43	3.44	3.56	3.67	3.77	3.87	4.01
72.5	2.30	2.37	2.43	2.51	2.59	2.67	2.76	2.86	2.95	3.10
75.0	1.63	1.66	1.70	1.74	1.77	1.87	1.97	2.10	2.23	2.30
77.5	1.14	1.12	1.10	1.12	1.14	1.24	1.33	1.42	1.50	1.59
80.0	0.64	0.65	0.66	0.66	0.65	0.72	0.79	0.87	0.94	0.98
82.5	0.30	0.33	0.35	0.35	0.34	0.38	0.41	0.46	0.50	0.53
85.0	0.19	0.20	0.21	0.21	0.21	0.22	0.22	0.24	0.25	0.26
87.5	0.08	0.09	0.10	0.09	0.08	0.09	0.09	0.09	0.09	0.10
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0.0	746.53	746.53	746.53	746.53	746.53	746.53	746.53	746.53	746.53
2.5	731.87	731.23	730.59	730.74	730.90	730.92	730.95	731.06	731.17
5.0	686.08	681.53	676.99	673.67	670.36	668.01	665.66	665.19	664.73
7.5	621.78	612.41	603.04	596.23	589.42	584.65	579.87	578.91	577.95
10.0	547.28	533.46	519.64	509.50	499.35	493.07	486.78	484.71	482.63
12.5	469.06	452.61	436.16	425.49	414.83	407.83	400.84	398.44	396.03
15.0	394.27	378.05	361.83	351.26	340.70	333.53	326.36	324.57	322.78
17.5	326.74	311.45	296.16	286.06	275.95	269.10	262.25	260.69	259.14
20.0	266.59	252.78	238.97	229.76	220.55	214.04	207.53	205.98	204.43
22.5	214.87	202.45	190.02	181.80	173.57	167.95	162.33	160.96	159.59
25.0	170.84	159.81	148.78	142.09	135.39	130.77	126.15	124.99	123.83
27.5	133.43	124.53	115.62	110.41	105.19	101.51	97.82	96.95	96.08
30.0	103.25	96.54	89.83	85.76	81.68	78.77	75.85	75.07	74.28

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX-5030-00-UNVE5-35-LG.IES

CANDELA TABULATION - (Cont.)

32.5	79.46	74.44	69.43	66.30	63.16	60.84	58.51	57.94	57.36
35.0	60.86	57.18	53.49	51.06	48.61	46.83	45.05	44.59	44.13
37.5	46.29	43.62	40.94	39.18	37.41	36.12	34.83	34.59	34.34
40.0	35.24	33.37	31.48	30.35	29.22	28.39	27.55	27.30	27.04
42.5	27.30	26.06	24.82	24.14	23.46	22.89	22.32	22.17	22.01
45.0	21.88	21.16	20.44	19.97	19.51	19.16	18.80	18.66	18.52
47.5	18.37	17.92	17.46	17.17	16.87	16.62	16.37	16.25	16.14
50.0	15.91	15.61	15.30	15.11	14.93	14.71	14.48	14.38	14.27
52.5	14.02	13.87	13.71	13.52	13.32	13.15	12.97	12.89	12.80
55.0	12.37	12.31	12.25	12.09	11.92	11.81	11.70	11.66	11.62
57.5	10.86	10.85	10.83	10.75	10.67	10.58	10.48	10.46	10.44
60.0	9.33	9.40	9.48	9.44	9.40	9.34	9.26	9.31	9.35
62.5	7.91	8.02	8.14	8.15	8.16	8.17	8.17	8.18	8.20
65.0	6.56	6.70	6.85	6.88	6.90	6.96	7.02	7.04	7.05
67.5	5.28	5.43	5.57	5.69	5.81	5.88	5.95	5.95	5.94
70.0	4.15	4.32	4.48	4.63	4.78	4.82	4.84	4.86	4.88
72.5	3.25	3.35	3.45	3.59	3.74	3.81	3.87	3.91	3.94
75.0	2.36	2.45	2.54	2.64	2.74	2.88	3.02	3.09	3.15
77.5	1.68	1.73	1.78	1.87	1.96	2.06	2.15	2.24	2.32
80.0	1.03	1.07	1.11	1.17	1.23	1.36	1.48	1.54	1.60
82.5	0.55	0.57	0.59	0.63	0.66	0.75	0.83	0.86	0.88
85.0	0.27	0.29	0.30	0.31	0.31	0.36	0.41	0.42	0.42
87.5	0.10	0.09	0.09	0.09	0.08	0.09	0.10	0.11	0.11
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX-5030-00-UNVE5-35-LG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	183.51	N.A.	50.50
0-30	277.81	N.A.	76.40
0-40	323.72	N.A.	89.00
0-60	354.30	N.A.	97.50
0-80	363.17	N.A.	99.90
0-90	363.55	N.A.	100.00
10-90	301.29	N.A.	82.90
20-40	140.21	N.A.	38.60
20-50	159.77	N.A.	43.90
40-70	36.92	N.A.	10.20
60-80	8.87	N.A.	2.40
70-80	2.52	N.A.	0.70
80-90	0.38	N.A.	0.10
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	363.55	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	62.26
10-20	121.25
20-30	94.30
30-40	45.91
40-50	19.56
50-60	11.01
60-70	6.35
70-80	2.52
80-90	0.38
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6RX-5030-00-UNVE5-35-LG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82
4	98	91	85	81	96	90	85	81	87	83	80	86	82	79	84	81	78	77
5	94	86	80	76	92	85	79	76	83	78	75	81	77	74	80	76	74	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	70	68
7	85	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65
8	82	73	67	64	81	72	67	63	71	67	63	70	66	63	69	66	63	61
9	79	70	64	60	77	69	64	60	68	63	60	67	63	60	66	63	60	58
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56

POLAR GRAPH

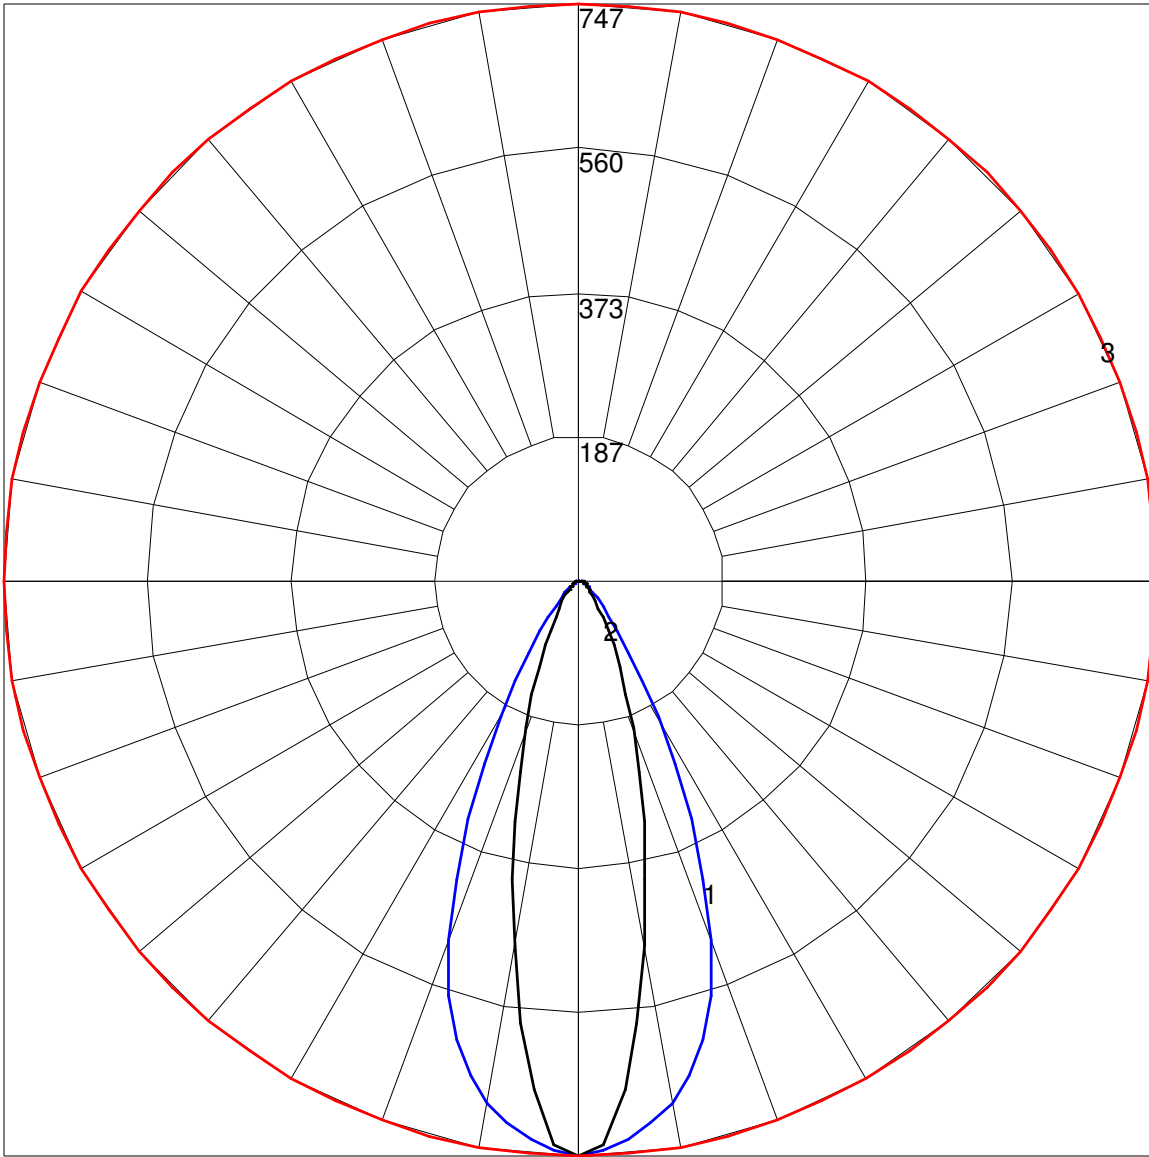

Maximum Candela = 746.53 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Vertical Plane Through Horizontal Angles (90 - 270)

3 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)