



1961 McGaw Ave, Irvine, CA 92614
phone: 949.442.1601
email: info@tempolc.com

IES INDOOR REPORT

PHOTOMETRIC FILENAME : C3DX-FL-0-6-3TW2S-LG-1 - 3000K ONLY.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 4187
[_ECN] 4072
[TESTLAB] Tempo LLC
[ISSUEDATE] 4/10/2020 1:28:40 PM
[MANUFAC] Tempo LLC
[LUMCAT] C3DX-FL-0-6-3TW2S-LG-1 - 3000K ONLY
[LUMINAIRE] Gray PVC housing with frosted lens
[LAMP] Seven (7) White LEDs (3000K)
[_ELECTRICALS] 23.99 VDC, 0.08 A, 1.00 PF

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	204
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	107
Total Luminaire Watts	1.91
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.20
Spacing Criterion (Diagonal)	1.36
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.06 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.02 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8685	8834	10235
55	7769	7828	9334
65	6937	6856	8227
75	6216	5863	6460
85	5777	5052	3061

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C3DX-FL-0-6-3TW2S-LG-1 - 3000K ONLY.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0.0	66.17	66.17	66.17	66.17	66.17	66.17	66.17	66.17	66.17	66.17
2.5	66.28	66.27	66.25	66.23	66.21	66.18	66.14	66.12	66.11	66.06
5.0	66.04	66.04	66.04	66.02	65.99	65.94	65.89	65.88	65.86	65.82
7.5	65.68	65.68	65.69	65.66	65.62	65.57	65.52	65.49	65.45	65.39
10.0	65.16	65.16	65.16	65.13	65.10	65.03	64.96	64.94	64.91	64.84
12.5	64.52	64.50	64.48	64.45	64.42	64.34	64.27	64.21	64.14	64.07
15.0	63.68	63.68	63.67	63.63	63.58	63.50	63.41	63.34	63.27	63.15
17.5	62.71	62.70	62.68	62.64	62.60	62.50	62.39	62.30	62.21	62.09
20.0	61.65	61.63	61.60	61.54	61.46	61.35	61.23	61.12	61.00	60.85
22.5	60.38	60.35	60.33	60.26	60.19	60.05	59.90	59.78	59.65	59.49
25.0	59.02	58.98	58.95	58.87	58.79	58.64	58.48	58.32	58.16	57.97
27.5	57.52	57.48	57.44	57.35	57.25	57.08	56.91	56.73	56.55	56.32
30.0	55.93	55.88	55.83	55.73	55.63	55.42	55.22	55.02	54.81	54.55
32.5	54.22	54.16	54.10	53.97	53.85	53.65	53.44	53.21	52.97	52.68
35.0	52.43	52.37	52.29	52.15	52.00	51.78	51.55	51.30	51.04	50.71
37.5	50.51	50.45	50.39	50.24	50.10	49.85	49.59	49.31	49.01	48.67
40.0	48.53	48.46	48.39	48.25	48.10	47.83	47.54	47.24	46.94	46.56
42.5	46.52	46.45	46.37	46.21	46.04	45.75	45.47	45.12	44.78	44.36
45.0	44.43	44.35	44.28	44.10	43.91	43.61	43.32	42.94	42.57	42.14
47.5	42.32	42.24	42.16	41.97	41.77	41.45	41.13	40.74	40.36	39.88
50.0	40.18	40.11	40.03	39.82	39.61	39.27	38.94	38.52	38.11	37.62
52.5	38.05	37.97	37.89	37.68	37.46	37.10	36.74	36.30	35.85	35.35
55.0	35.93	35.84	35.75	35.53	35.31	34.93	34.55	34.08	33.61	33.07
57.5	33.85	33.75	33.65	33.42	33.19	32.80	32.40	31.90	31.40	30.83
60.0	31.73	31.66	31.58	31.33	31.08	30.68	30.28	29.77	29.25	28.63
62.5	29.73	29.63	29.53	29.28	29.04	28.63	28.21	27.67	27.12	26.47
65.0	27.70	27.63	27.56	27.31	27.05	26.62	26.18	25.61	25.03	24.34
67.5	25.72	25.64	25.55	25.29	25.03	24.60	24.17	23.56	22.95	22.24
70.0	23.79	23.70	23.61	23.33	23.05	22.61	22.17	21.55	20.93	20.17
72.5	21.91	21.83	21.75	21.47	21.18	20.69	20.20	19.58	18.95	18.17
75.0	20.14	20.04	19.94	19.65	19.35	18.86	18.36	17.71	17.05	16.23
77.5	18.42	18.32	18.21	17.91	17.62	17.12	16.61	15.93	15.24	14.38
80.0	16.78	16.68	16.57	16.26	15.95	15.46	14.96	14.26	13.54	12.67
82.5	15.23	15.13	15.02	14.72	14.41	13.91	13.40	12.68	11.96	11.07
85.0	13.80	13.69	13.57	13.26	12.95	12.45	11.94	11.23	10.51	9.61
87.5	12.44	12.33	12.22	11.92	11.62	11.11	10.60	9.89	9.18	8.29
90.0	10.08	9.99	9.90	9.63	9.35	8.90	8.45	7.83	7.20	6.42
100.0	5.82	5.75	5.68	5.48	5.27	4.94	4.61	4.18	3.75	3.26
110.0	3.36	3.32	3.28	3.15	3.01	2.76	2.50	2.19	1.87	1.61
120.0	1.72	1.67	1.62	1.55	1.47	1.37	1.27	1.13	0.99	0.88
130.0	0.94	0.94	0.94	0.88	0.81	0.76	0.70	0.64	0.57	0.47
140.0	0.46	0.44	0.42	0.39	0.36	0.32	0.28	0.23	0.18	0.14
150.0	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.06
160.0	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
170.0	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0.0	66.17	66.17	66.17	66.17	66.17	66.17	66.17	66.17	66.17
2.5	66.02	66.02	66.03	65.99	65.96	65.94	65.92	65.96	66.00
5.0	65.77	65.76	65.75	65.71	65.67	65.66	65.64	65.66	65.67
7.5	65.33	65.31	65.28	65.24	65.19	65.18	65.17	65.18	65.19

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C3DX-FL-0-6-3TW2S-LG-1 - 3000K ONLY.IES

CANDELA TABULATION - (Cont.)

10.0	64.76	64.72	64.68	64.61	64.54	64.51	64.49	64.51	64.54
12.5	63.99	63.94	63.88	63.80	63.71	63.68	63.64	63.66	63.67
15.0	63.02	62.96	62.89	62.80	62.71	62.67	62.62	62.63	62.64
17.5	61.96	61.85	61.74	61.62	61.50	61.45	61.40	61.40	61.40
20.0	60.70	60.57	60.44	60.31	60.17	60.09	60.01	60.01	60.01
22.5	59.31	59.15	58.99	58.83	58.67	58.59	58.50	58.48	58.46
25.0	57.77	57.59	57.40	57.22	57.03	56.91	56.78	56.77	56.76
27.5	56.08	55.88	55.67	55.47	55.26	55.11	54.96	54.94	54.92
30.0	54.28	54.05	53.82	53.58	53.33	53.18	53.03	52.98	52.93
32.5	52.38	52.12	51.84	51.59	51.32	51.14	50.96	50.91	50.85
35.0	50.39	50.08	49.77	49.49	49.21	49.01	48.80	48.74	48.67
37.5	48.32	47.98	47.63	47.32	47.01	46.77	46.54	46.47	46.40
40.0	46.17	45.79	45.41	45.07	44.72	44.48	44.23	44.14	44.06
42.5	43.95	43.54	43.13	42.76	42.39	42.12	41.85	41.76	41.66
45.0	41.70	41.27	40.83	40.43	40.01	39.71	39.40	39.29	39.16
47.5	39.41	38.95	38.49	38.06	37.62	37.30	36.97	36.84	36.71
50.0	37.13	36.63	36.13	35.66	35.19	34.84	34.49	34.35	34.21
52.5	34.83	34.30	33.77	33.27	32.77	32.39	32.00	31.85	31.69
55.0	32.52	31.97	31.42	30.88	30.34	29.95	29.55	29.39	29.22
57.5	30.27	29.69	29.10	28.54	27.97	27.54	27.10	26.93	26.75
60.0	28.01	27.41	26.80	26.20	25.59	25.13	24.67	24.47	24.27
62.5	25.82	25.17	24.51	23.86	23.19	22.70	22.21	21.99	21.77
65.0	23.65	22.95	22.24	21.54	20.84	20.29	19.74	19.50	19.25
67.5	21.52	20.76	19.98	19.23	18.46	17.89	17.30	17.04	16.77
70.0	19.42	18.61	17.80	16.99	16.17	15.53	14.90	14.61	14.33
72.5	17.40	16.54	15.67	14.79	13.91	13.22	12.53	12.22	11.91
75.0	15.40	14.51	13.61	12.69	11.76	11.01	10.26	9.90	9.55
77.5	13.51	12.58	11.64	10.67	9.70	8.89	8.07	7.68	7.29
80.0	11.78	10.78	9.78	8.78	7.77	6.90	6.03	5.62	5.21
82.5	10.18	9.15	8.12	7.07	6.01	5.11	4.21	3.77	3.32
85.0	8.71	7.68	6.65	5.59	4.53	3.61	2.68	2.22	1.75
87.5	7.40	6.40	5.40	4.38	3.37	2.49	1.60	1.14	0.68
90.0	5.64	4.79	3.95	3.11	2.26	1.58	0.90	0.60	0.29
100.0	2.77	2.26	1.75	1.30	0.85	0.62	0.39	0.33	0.27
110.0	1.34	1.10	0.86	0.66	0.46	0.35	0.23	0.23	0.23
120.0	0.78	0.62	0.46	0.33	0.20	0.19	0.17	0.17	0.17
130.0	0.37	0.27	0.17	0.15	0.12	0.13	0.13	0.13	0.13
140.0	0.10	0.10	0.09	0.09	0.10	0.10	0.10	0.10	0.09
150.0	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07
160.0	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
170.0	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C3DX-FL-0-6-3TW2S-LG-1 - 3000K ONLY.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	24.06	N.A.	11.80
0-30	50.74	N.A.	24.90
0-40	82.40	N.A.	40.40
0-60	144.21	N.A.	70.70
0-80	184.54	N.A.	90.50
0-90	194.23	N.A.	95.20
10-90	187.98	N.A.	92.20
20-40	58.34	N.A.	28.60
20-50	90.74	N.A.	44.50
40-70	85.57	N.A.	42.00
60-80	40.32	N.A.	19.80
70-80	16.57	N.A.	8.10
80-90	9.69	N.A.	4.80
90-110	7.46	N.A.	3.70
90-120	8.75	N.A.	4.30
90-130	9.36	N.A.	4.60
90-150	9.71	N.A.	4.80
90-180	9.75	N.A.	4.80
110-180	2.29	N.A.	1.10
0-180	203.98	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	6.25
10-20	17.81
20-30	26.68
30-40	31.66
40-50	32.40
50-60	29.41
60-70	23.76
70-80	16.57
80-90	9.69
90-100	4.91
100-110	2.56
110-120	1.28
120-130	0.61
130-140	0.27
140-150	0.09
150-160	0.02
160-170	0.01
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C3DX-FL-0-6-3TW2S-LG-1 - 3000K ONLY.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	108	108	108	103	103	103	98	98	98	95
1	106	101	96	92	103	98	94	90	93	89	86	88	85	83	84	81	79	77
2	96	87	80	74	93	85	78	73	81	75	70	77	72	68	73	69	66	63
3	88	77	68	61	85	75	67	60	71	64	59	67	62	57	64	59	55	53
4	80	68	59	52	77	66	58	51	63	56	50	60	54	49	57	52	47	45
5	74	60	51	44	71	59	50	44	56	49	43	54	47	42	51	46	41	39
6	68	54	45	39	66	53	45	38	51	43	38	49	42	37	47	41	36	34
7	63	49	40	34	61	48	40	34	46	39	33	44	38	33	43	37	32	30
8	59	45	36	30	57	44	36	30	42	35	30	41	34	29	39	33	29	27
9	55	41	33	27	53	40	33	27	39	32	27	38	31	26	36	30	26	24
10	51	38	30	25	50	37	30	25	36	29	24	35	28	24	34	28	24	22

POLAR GRAPH

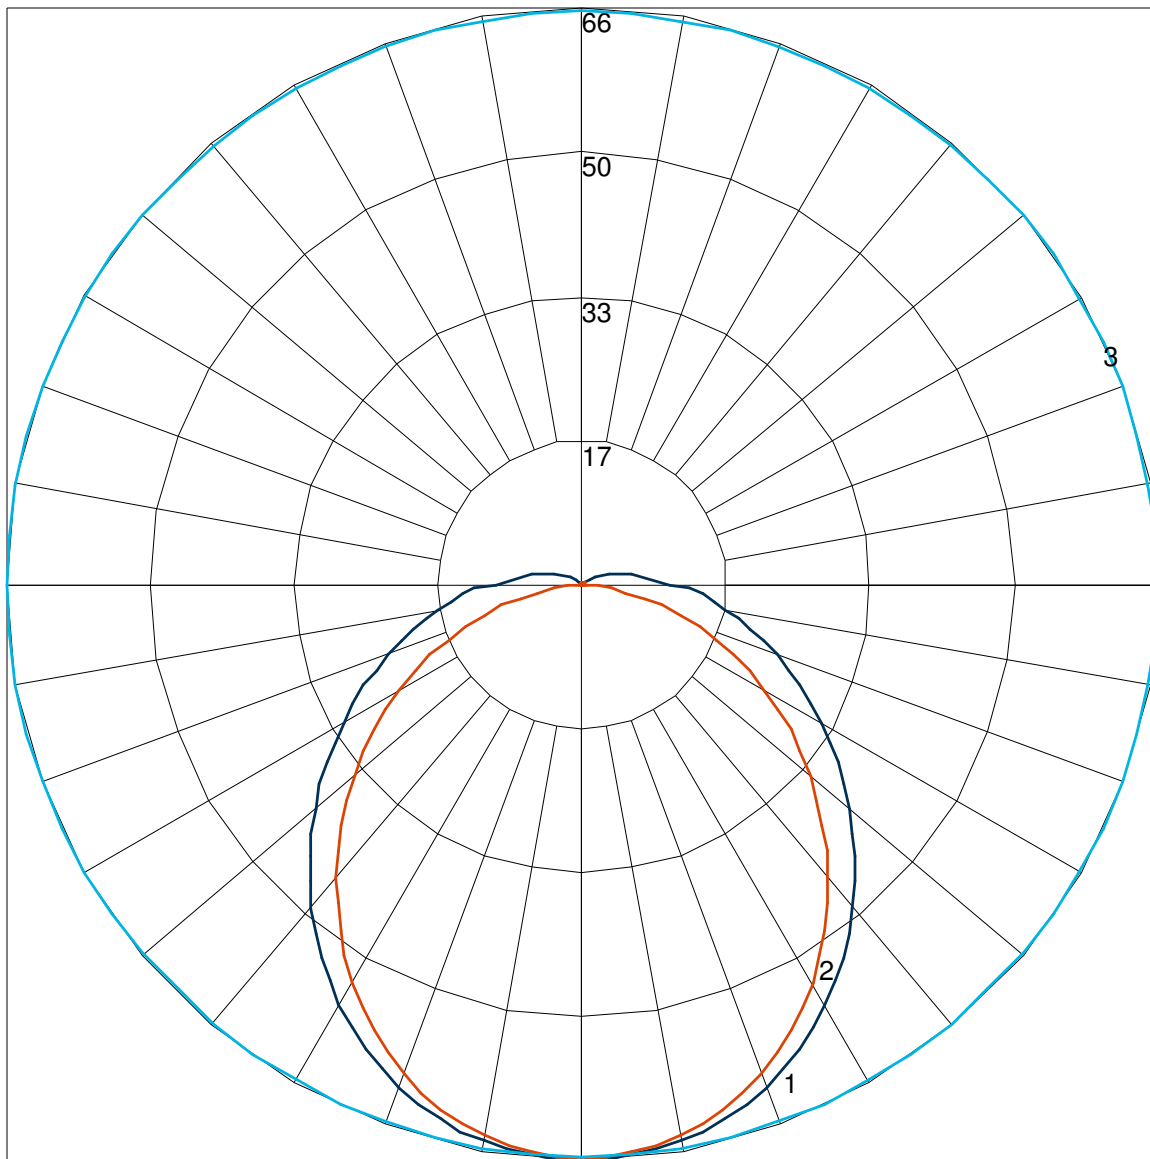

Maximum Candela = 66.28 Located At Horizontal Angle = 0, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)