



1961 McGaw Ave, Irvine, CA 92614
phone: 949.442.1601
email: info@tempolc.com

IES INDOOR REPORT PHOTOMETRIC FILENAME : SL-PRO-24DC-04-35-01.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 3901
[_ECN] 3935
[TESTLAB] Tempo LLC
[ISSUEDATE] 9/12/2019 6:42:49 AM
[MANUFAC] Tempo LLC
[LUMCAT] SL-PRO-24DC-04-35-01
[LUMINAIRE] Aluminum housing with opal lens
[LAMP] Fifty-four (54) white LEDs (3500K)
[_ELECTRICALS] 24.03 VDC, 0.16 A, 1.00 PF

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	104
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	26
Total Luminaire Watts	3.92
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.34
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.44
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.06 ft
Luminous Width (90-270)	1.00 ft
Luminous Height	0.04 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	3170	3283	4450
55	2975	2997	4227
65	2848	2742	3797
75	2847	2590	2934
85	2831	2674	1070

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SL-PRO-24DC-04-35-01.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0.0	27.89	27.89	27.89	27.89	27.89	27.89	27.89	27.89	27.89	27.89
2.5	27.99	27.95	27.89	27.89	27.88	27.88	27.88	27.88	27.87	27.87
5.0	27.91	27.86	27.81	27.80	27.79	27.80	27.80	27.79	27.77	27.76
7.5	27.77	27.74	27.70	27.68	27.66	27.65	27.64	27.63	27.61	27.61
10.0	27.59	27.55	27.51	27.50	27.48	27.47	27.45	27.44	27.42	27.42
12.5	27.36	27.33	27.29	27.27	27.24	27.23	27.22	27.21	27.20	27.19
15.0	27.10	27.07	27.02	27.00	26.97	26.96	26.94	26.93	26.92	26.91
17.5	26.79	26.75	26.71	26.69	26.66	26.65	26.63	26.62	26.60	26.59
20.0	26.47	26.41	26.36	26.34	26.31	26.30	26.28	26.26	26.23	26.22
22.5	26.09	26.03	25.97	25.95	25.93	25.91	25.88	25.86	25.84	25.80
25.0	25.71	25.64	25.57	25.55	25.52	25.48	25.45	25.42	25.38	25.33
27.5	25.29	25.22	25.14	25.11	25.08	25.04	24.99	24.94	24.88	24.81
30.0	24.84	24.77	24.69	24.66	24.61	24.56	24.50	24.42	24.34	24.26
32.5	24.37	24.30	24.22	24.17	24.11	24.04	23.97	23.87	23.76	23.66
35.0	23.88	23.80	23.71	23.66	23.60	23.51	23.42	23.29	23.16	23.04
37.5	23.35	23.27	23.18	23.12	23.05	22.94	22.82	22.68	22.53	22.38
40.0	22.83	22.74	22.64	22.57	22.49	22.35	22.21	22.04	21.88	21.70
42.5	22.28	22.18	22.08	21.99	21.90	21.74	21.57	21.39	21.20	20.99
45.0	21.71	21.61	21.51	21.41	21.31	21.12	20.93	20.71	20.49	20.25
47.5	21.14	21.03	20.92	20.81	20.70	20.48	20.26	20.01	19.77	19.50
50.0	20.55	20.44	20.33	20.21	20.09	19.84	19.58	19.31	19.03	18.73
52.5	19.95	19.84	19.73	19.60	19.47	19.19	18.90	18.59	18.28	17.93
55.0	19.36	19.25	19.13	18.99	18.84	18.53	18.22	17.87	17.52	17.14
57.5	18.76	18.64	18.53	18.37	18.22	17.88	17.54	17.15	16.76	16.34
60.0	18.16	18.05	17.94	17.77	17.61	17.24	16.87	16.45	16.02	15.54
62.5	17.58	17.47	17.35	17.19	17.03	16.62	16.22	15.74	15.27	14.75
65.0	17.00	16.88	16.77	16.60	16.43	16.00	15.56	15.05	14.54	13.97
67.5	16.43	16.32	16.20	15.96	15.72	15.31	14.90	14.36	13.83	13.21
70.0	15.90	15.78	15.65	15.39	15.13	14.71	14.28	13.73	13.17	12.51
72.5	15.38	15.27	15.15	14.87	14.58	14.15	13.71	13.12	12.53	11.81
75.0	14.94	14.82	14.70	14.42	14.13	13.67	13.20	12.57	11.94	11.18
77.5	14.56	14.44	14.32	14.02	13.72	13.25	12.77	12.12	11.46	10.64
80.0	14.23	14.12	14.01	13.71	13.42	12.92	12.43	11.74	11.06	10.20
82.5	13.50	13.40	13.30	13.05	12.80	12.38	11.97	11.35	10.73	9.87
85.0	12.36	12.27	12.18	11.94	11.69	11.30	10.90	10.36	9.81	9.11
87.5	10.79	10.71	10.62	10.38	10.14	9.76	9.38	8.87	8.35	7.71
90.0	8.92	8.85	8.77	8.53	8.30	7.93	7.56	7.05	6.53	5.89
95.0	5.84	5.76	5.68	5.39	5.10	4.65	4.21	3.62	3.02	2.36
100.0	0.96	0.92	0.87	0.68	0.49	0.35	0.21	0.17	0.13	0.12
105.0	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.06
110.0	0.00	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04
115.0	0.00	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03
120.0	0.00	0.00	0.00	0.03	0.03	0.03	0.02	0.03	0.02	0.02
125.0	0.00	0.00	0.00	0.02	0.02	0.02	0.00	0.02	0.00	0.00
130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SL-PRO-24DC-04-35-01.IES

CANDELA TABULATION - (Cont.)

180.0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00

Vert. Horizontal Angles
Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0.0	27.89	27.89	27.89	27.89	27.89	27.89	27.89	27.89	27.89
2.5	27.86	27.86	27.84	27.84	27.83	27.82	27.81	27.80	27.79
5.0	27.74	27.74	27.73	27.72	27.70	27.70	27.69	27.68	27.67
7.5	27.59	27.59	27.57	27.56	27.55	27.54	27.53	27.52	27.51
10.0	27.40	27.39	27.38	27.38	27.37	27.36	27.35	27.34	27.33
12.5	27.18	27.17	27.15	27.15	27.14	27.12	27.10	27.10	27.10
15.0	26.90	26.89	26.87	26.86	26.84	26.83	26.82	26.81	26.81
17.5	26.57	26.55	26.54	26.52	26.49	26.48	26.46	26.45	26.44
20.0	26.19	26.18	26.15	26.12	26.09	26.07	26.04	26.04	26.03
22.5	25.77	25.72	25.68	25.65	25.62	25.60	25.58	25.56	25.54
25.0	25.27	25.23	25.18	25.14	25.10	25.08	25.06	25.04	25.03
27.5	24.74	24.69	24.63	24.59	24.54	24.52	24.48	24.47	24.45
30.0	24.16	24.10	24.03	23.98	23.93	23.89	23.86	23.85	23.83
32.5	23.55	23.47	23.38	23.32	23.26	23.23	23.19	23.18	23.16
35.0	22.90	22.81	22.71	22.63	22.56	22.52	22.48	22.45	22.42
37.5	22.22	22.10	21.98	21.89	21.80	21.76	21.71	21.69	21.66
40.0	21.52	21.37	21.22	21.11	21.00	20.95	20.88	20.87	20.84
42.5	20.78	20.60	20.42	20.29	20.16	20.10	20.02	20.00	19.97
45.0	20.02	19.80	19.58	19.43	19.27	19.19	19.11	19.08	19.05
47.5	19.23	18.98	18.73	18.54	18.35	18.26	18.16	18.12	18.09
50.0	18.42	18.13	17.84	17.62	17.39	17.28	17.16	17.12	17.08
52.5	17.59	17.26	16.94	16.67	16.40	16.26	16.12	16.07	16.02
55.0	16.76	16.39	16.00	15.70	15.38	15.21	15.04	14.99	14.93
57.5	15.91	15.49	15.06	14.71	14.35	14.14	13.93	13.87	13.80
60.0	15.06	14.59	14.11	13.70	13.28	13.03	12.78	12.70	12.62
62.5	14.22	13.69	13.15	12.68	12.20	11.90	11.59	11.50	11.41
65.0	13.38	12.79	12.19	11.65	11.11	10.75	10.38	10.28	10.16
67.5	12.59	11.92	11.25	10.64	10.02	9.60	9.17	9.03	8.90
70.0	11.84	11.09	10.34	9.65	8.97	8.48	7.98	7.82	7.65
72.5	11.09	10.29	9.47	8.71	7.95	7.38	6.79	6.59	6.38
75.0	10.42	9.55	8.68	7.84	6.99	6.30	5.61	5.36	5.10
77.5	9.82	8.90	7.99	7.04	6.09	5.29	4.49	4.18	3.86
80.0	9.35	8.37	7.38	6.34	5.30	4.39	3.48	3.09	2.69
82.5	9.00	7.95	6.91	5.78	4.65	3.63	2.60	2.13	1.65
85.0	8.41	7.48	6.55	5.36	4.16	3.05	1.93	1.36	0.80
87.5	7.05	6.25	5.44	4.52	3.59	2.52	1.45	0.84	0.22
90.0	5.25	4.50	3.75	2.97	2.19	1.46	0.73	0.38	0.02
95.0	1.70	1.09	0.46	0.30	0.13	0.09	0.03	0.03	0.00
100.0	0.11	0.10	0.08	0.06	0.03	0.02	0.01	0.02	0.00
105.0	0.05	0.05	0.04	0.03	0.02	0.00	0.00	0.00	0.00
110.0	0.04	0.03	0.02	0.02	0.00	0.00	0.00	0.00	0.00
115.0	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SL-PRO-24DC-04-35-01.IES

CANDELA TABULATION - (Cont.)

165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SL-PRO-24DC-04-35-01.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	10.24	N.A.	9.90
0-30	21.92	N.A.	21.10
0-40	36.37	N.A.	35.00
0-60	67.36	N.A.	64.90
0-80	92.31	N.A.	88.90
0-90	100.78	N.A.	97.10
10-90	98.14	N.A.	94.50
20-40	26.13	N.A.	25.20
20-50	41.80	N.A.	40.30
40-70	44.64	N.A.	43.00
60-80	24.95	N.A.	24.00
70-80	11.30	N.A.	10.90
80-90	8.47	N.A.	8.20
90-110	3.03	N.A.	2.90
90-120	3.04	N.A.	2.90
90-130	3.05	N.A.	2.90
90-150	3.05	N.A.	2.90
90-180	3.05	N.A.	2.90
110-180	0.02	N.A.	0.00
0-180	103.83	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	2.64
10-20	7.60
20-30	11.68
30-40	14.45
40-50	15.67
50-60	15.32
60-70	13.65
70-80	11.30
80-90	8.47
90-100	2.93
100-110	0.10
110-120	0.02
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT


PHOTOMETRIC FILENAME : SL-PRO-24DC-04-35-01.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	105	98	93	88	101	96	91	86	91	87	83	86	83	80	82	79	77	74
2	94	84	76	69	91	82	74	68	78	71	66	74	69	64	70	66	62	59
3	85	73	64	56	82	71	62	55	67	60	54	64	58	53	61	56	51	49
4	77	64	54	47	75	62	53	46	59	52	45	57	50	44	54	48	43	41
5	71	57	47	40	68	56	46	40	53	45	39	51	44	38	48	42	37	35
6	65	51	41	35	63	50	41	34	48	40	34	46	39	33	44	37	33	30
7	60	46	37	30	58	45	36	30	43	35	30	42	34	29	40	34	29	27
8	56	42	33	27	54	41	33	27	40	32	26	38	31	26	37	30	26	24
9	53	38	30	24	51	38	29	24	36	29	24	35	28	23	34	28	23	21
10	49	35	27	22	48	35	27	22	34	26	21	32	26	21	31	25	21	19

POLAR GRAPH

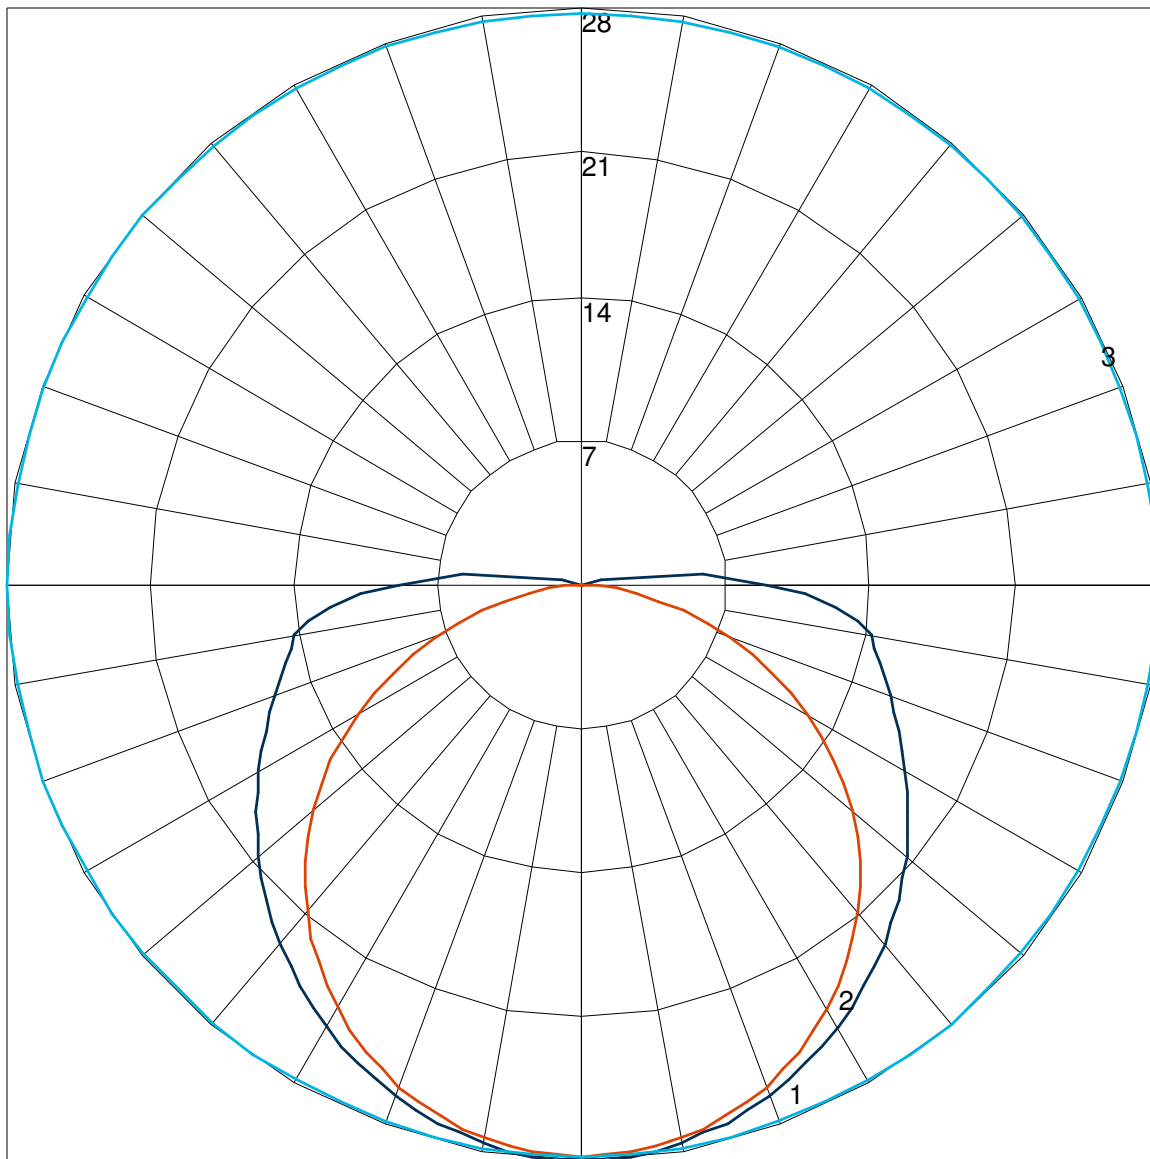

Maximum Candela = 27.99 Located At Horizontal Angle = 0, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)