



1961 McGaw Ave, Irvine, CA 92614
phone: 949.442.1601
email: info@tempolc.com

IES INDOOR REPORT

PHOTOMETRIC FILENAME : C6C-40X60-UNVE5-35LG-1.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 4499
[TESTLAB] Tempo LLC
[ISSUEDATE] 5/10/2023 8:00:33 AM
[MANUFAC] Tempo LLC
[LUMCAT] C6C-40X60-UNVE5-35LG-1
[LUMINAIRE] Light gray aluminum housing with lens
[LAMP] Sixteen (16) white LEDs (3500K) with optics
[ELECTRICALS] 120.15 VAC, 0.0320 A, 0.9524 PF

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	352
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	91
Total Luminaire Watts	3.85
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.60
Spacing Criterion (90-270)	0.74
Spacing Criterion (Diagonal)	0.72
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	0.97 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8082	10274	12396
55	4726	6926	9324
65	2794	4815	7379
75	1776	3270	5607
85	734	1544	2814

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6C-40X60-UNVE5-35LG-1.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0.0	429.60	429.60	429.60	429.60	429.60	429.60	429.60	429.60	429.60	429.60
2.5	427.21	421.89	416.57	416.49	416.41	421.48	426.55	426.54	426.52	426.68
5.0	406.09	401.65	397.21	397.64	398.06	403.45	408.84	409.81	410.78	411.99
7.5	374.36	370.97	367.56	368.79	370.02	375.64	381.25	383.55	385.86	388.48
10.0	336.16	334.00	331.85	333.70	335.56	341.23	346.90	350.59	354.28	358.22
12.5	296.63	295.52	294.42	296.64	298.85	304.29	309.74	314.33	318.92	323.91
15.0	259.31	258.99	258.68	261.03	263.39	268.07	272.74	277.74	282.73	288.32
17.5	226.92	226.89	226.86	228.54	230.22	234.43	238.64	243.42	248.19	253.77
20.0	198.82	198.97	199.13	200.32	201.50	204.98	208.45	212.61	216.77	221.83
22.5	174.43	174.57	174.72	175.61	176.50	179.36	182.22	185.72	189.22	193.30
25.0	152.55	152.81	153.08	153.77	154.46	156.91	159.36	162.10	164.83	168.19
27.5	132.98	133.38	133.78	134.49	135.20	137.23	139.27	141.60	143.92	146.59
30.0	115.45	115.90	116.35	117.08	117.81	119.78	121.73	123.71	125.69	128.01
32.5	99.59	100.02	100.45	101.18	101.90	103.68	105.47	107.47	109.45	111.63
35.0	85.29	85.75	86.21	86.84	87.47	89.22	90.97	92.96	94.94	97.07
37.5	72.72	73.15	73.58	74.22	74.85	76.49	78.13	80.13	82.14	84.25
40.0	61.94	62.27	62.61	63.23	63.84	65.36	66.88	68.90	70.92	72.97
42.5	52.55	52.93	53.32	53.84	54.36	55.82	57.27	59.16	61.05	63.08
45.0	42.88	43.43	43.97	45.09	46.22	47.63	49.04	50.81	52.57	54.51
47.5	35.27	35.68	36.09	37.09	38.09	39.93	41.76	43.49	45.23	47.08
50.0	29.46	29.80	30.14	30.91	31.69	33.37	35.05	36.95	38.84	40.61
52.5	24.60	24.97	25.33	25.97	26.60	28.02	29.44	31.26	33.08	34.82
55.0	20.34	20.77	21.19	21.81	22.41	23.59	24.77	26.44	28.10	29.81
57.5	16.70	17.15	17.61	18.23	18.86	19.86	20.87	22.37	23.87	25.45
60.0	13.61	14.04	14.46	15.12	15.77	16.66	17.56	18.87	20.16	21.60
62.5	11.05	11.41	11.76	12.41	13.06	13.87	14.69	15.82	16.93	18.25
65.0	8.86	9.18	9.51	10.09	10.69	11.43	12.17	13.12	14.06	15.27
67.5	7.06	7.35	7.63	8.14	8.66	9.33	10.00	10.79	11.59	12.62
70.0	5.64	5.86	6.08	6.50	6.92	7.49	8.06	8.73	9.41	10.29
72.5	4.47	4.64	4.80	5.11	5.41	5.87	6.33	6.94	7.55	8.24
75.0	3.45	3.56	3.66	3.89	4.11	4.49	4.87	5.34	5.80	6.35
77.5	2.55	2.64	2.73	2.88	3.03	3.31	3.58	3.94	4.29	4.73
80.0	1.81	1.86	1.90	1.99	2.08	2.28	2.48	2.73	2.98	3.29
82.5	1.14	1.16	1.18	1.25	1.32	1.44	1.55	1.72	1.90	2.09
85.0	0.48	0.50	0.53	0.59	0.66	0.71	0.76	0.84	0.92	1.01
87.5	0.14	0.16	0.18	0.18	0.18	0.22	0.25	0.26	0.26	0.29
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0.0	429.60	429.60	429.60	429.60	429.60	429.60	429.60	429.60	429.60
2.5	426.84	426.93	427.02	427.06	427.11	427.25	427.39	427.53	427.67
5.0	413.18	414.24	415.29	416.19	417.08	417.72	418.36	418.60	418.84
7.5	391.09	393.47	395.84	397.75	399.65	401.02	402.37	402.73	403.07
10.0	362.15	366.02	369.88	372.84	375.79	377.86	379.95	380.61	381.28
12.5	328.91	333.89	338.86	342.86	346.86	349.71	352.57	353.37	354.17
15.0	293.90	299.61	305.30	310.01	314.71	317.92	321.12	322.12	323.12
17.5	259.35	265.23	271.10	275.92	280.74	284.15	287.55	288.54	289.52
20.0	226.88	232.37	237.85	242.49	247.12	250.44	253.76	254.78	255.79
22.5	197.38	202.23	207.07	211.19	215.32	218.35	221.38	222.28	223.18
25.0	171.55	175.53	179.51	183.01	186.50	189.08	191.65	192.47	193.29
27.5	149.26	152.40	155.54	158.44	161.33	163.51	165.69	166.34	166.99
30.0	130.34	132.87	135.40	137.76	140.11	141.91	143.71	144.19	144.66

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6C-40X60-UNVE5-35LG-1.IES

CANDELA TABULATION - (Cont.)

32.5	113.79	116.04	118.28	120.36	122.44	123.92	125.40	125.75	126.09
35.0	99.21	101.32	103.44	105.28	107.12	108.41	109.69	110.02	110.35
37.5	86.36	88.38	90.40	92.09	93.77	94.98	96.18	96.48	96.78
40.0	75.02	77.01	78.99	80.55	82.09	83.26	84.41	84.68	84.95
42.5	65.11	66.99	68.87	70.40	71.92	73.03	74.15	74.45	74.74
45.0	56.45	58.31	60.17	61.57	62.97	64.11	65.25	65.51	65.77
47.5	48.94	50.71	52.47	53.86	55.24	56.35	57.46	57.79	58.11
50.0	42.38	44.06	45.74	47.09	48.44	49.55	50.66	50.99	51.31
52.5	36.56	38.19	39.82	41.16	42.51	43.58	44.64	45.02	45.40
55.0	31.52	33.08	34.65	35.96	37.26	38.31	39.35	39.74	40.13
57.5	27.02	28.54	30.06	31.30	32.54	33.58	34.62	35.02	35.42
60.0	23.03	24.45	25.87	27.08	28.29	29.31	30.33	30.70	31.07
62.5	19.56	20.84	22.12	23.27	24.41	25.40	26.38	26.74	27.11
65.0	16.48	17.65	18.82	19.85	20.89	21.81	22.73	23.06	23.40
67.5	13.65	14.71	15.77	16.70	17.64	18.49	19.35	19.68	20.01
70.0	11.18	12.09	12.99	13.83	14.66	15.42	16.18	16.49	16.79
72.5	8.93	9.71	10.50	11.22	11.94	12.57	13.21	13.48	13.75
75.0	6.90	7.57	8.24	8.83	9.42	9.95	10.47	10.68	10.89
77.5	5.16	5.66	6.15	6.62	7.10	7.51	7.93	8.09	8.25
80.0	3.59	3.96	4.34	4.68	5.01	5.33	5.65	5.76	5.87
82.5	2.27	2.50	2.73	2.97	3.20	3.40	3.59	3.65	3.71
85.0	1.11	1.23	1.36	1.46	1.55	1.67	1.79	1.81	1.84
87.5	0.31	0.32	0.33	0.37	0.41	0.43	0.44	0.44	0.43
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6C-40X60-UNVE5-35LG-1.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	117.68	N.A.	33.40
0-30	196.37	N.A.	55.80
0-40	257.76	N.A.	73.20
0-60	327.41	N.A.	93.00
0-80	350.45	N.A.	99.60
0-90	351.91	N.A.	100.00
10-90	314.47	N.A.	89.40
20-40	140.07	N.A.	39.80
20-50	182.61	N.A.	51.90
40-70	85.43	N.A.	24.30
60-80	23.03	N.A.	6.50
70-80	7.26	N.A.	2.10
80-90	1.47	N.A.	0.40
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	351.91	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	37.45
10-20	80.24
20-30	78.69
30-40	61.38
40-50	42.54
50-60	27.12
60-70	15.77
70-80	7.26
80-90	1.47
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : C6C-40X60-UNVE5-35LG-1.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98	99	97	95	95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	61
6	82	72	65	60	80	71	64	60	69	63	59	68	63	59	66	62	58	57
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	52
8	73	63	56	51	72	62	56	51	61	55	51	60	54	51	59	54	50	49
9	70	59	52	48	68	58	52	48	57	52	48	56	51	47	55	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45	53	48	44	53	48	44	43

POLAR GRAPH

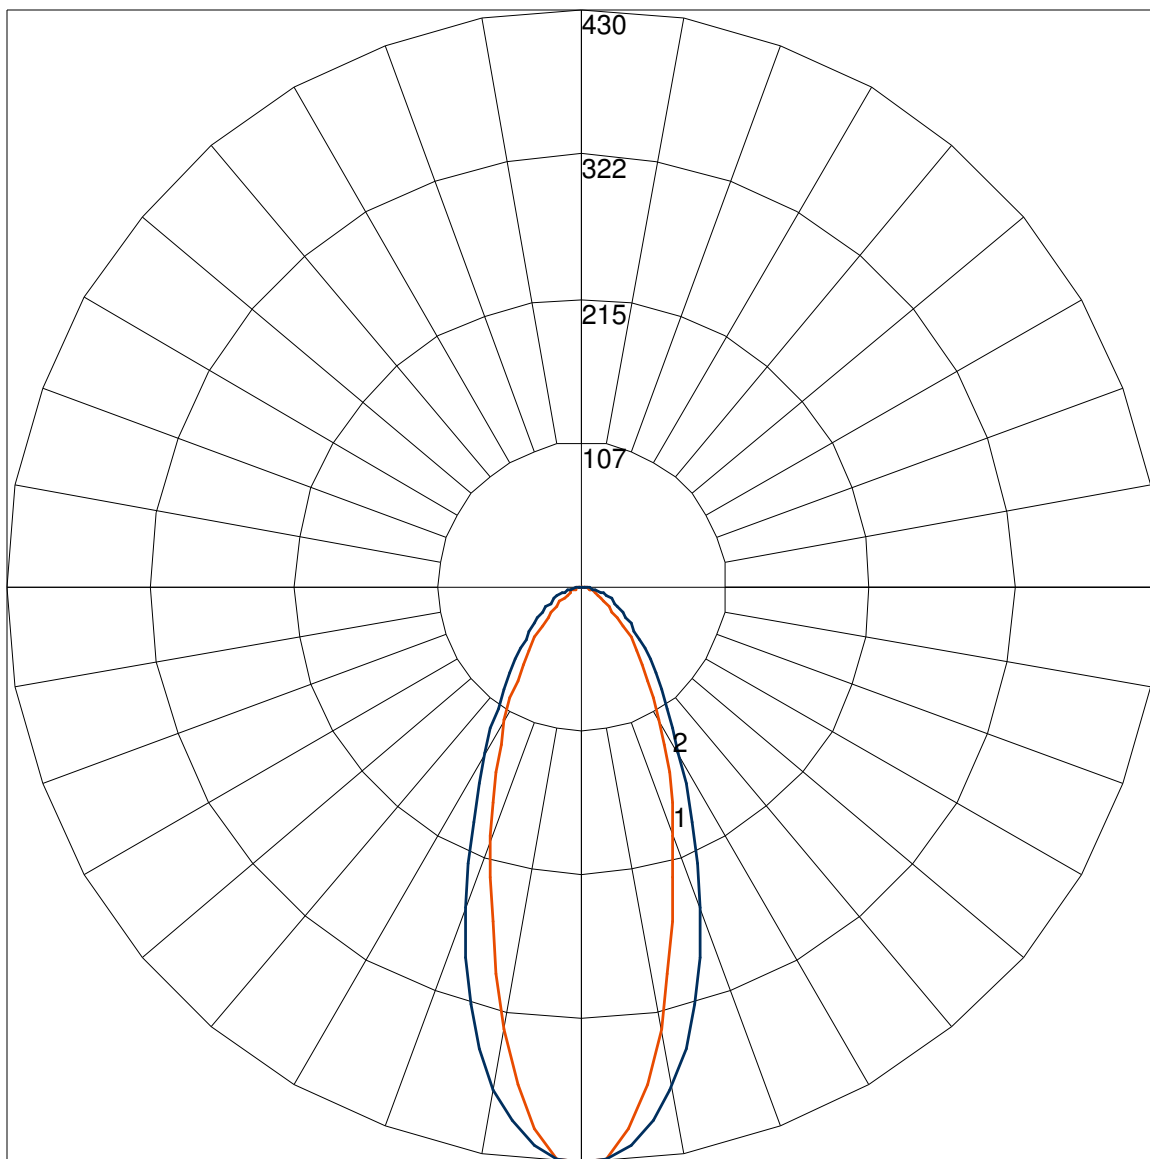

Maximum Candela = 429.6 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180)

2 - Vertical Plane Through Horizontal Angles (90 - 270)