

Vanguard™

FLUSH RACEWAY ILLUMINATED DISPLAY



APPLICATION

Tempo's Vanguard series of illuminated displays are attractive, low-profile and customizable. Constructed to withstand the most demanding environments, the Vanguard Series employs a tamper resistant, durable nonferrous cast housing, impact resistant cast acrylic lens and long lasting LED light sources. Available with a wide selection of standard lettering and/or graphics the Vanguard also offers six (6) standard LED light colors. Customizing is available to incorporate different fonts and graphics.

The Vanguard Flush Raceway LED display is designed to work in conjunction with the LPS Series Carpet to Floor Raceway. An integral splice compartment allows for secure connection to the LED panel.

Using only 0.3 watts per luminaire, the Vanguard Series from Tempo Industries is an attractive, durable and economical method of communication to patrons of your facility.

CONSTRUCTION

- Corrosion resistant die cast zinc housing
- Impact resistant cast acrylic lens
- Replaceable individual LED's
- Wide selection of standard graphics
- Custom graphics available

PERFORMANCE

- 0.3 watts per luminaire
- Operating temperature range of -20°C to 50°C

LIGHT CHARACTERISTICS


- LED colors available in Amber, Blue, Green, Red, Yellow and White

SUGGESTED COMPANION PRODUCTS

- LPS® – Raceway
- LPS® and Guardian – Gray Stripe Step Nose extrusion

SEE ALSO

- Vanguard Flush Carpet Mount Illuminated Display
- Vanguard Surface Mount Illuminated Display

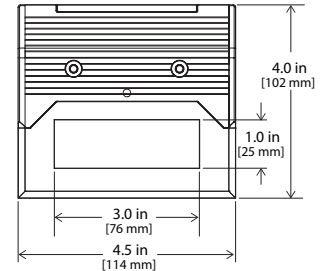

Buy Tempo
Buy American



WARRANTY

Tempo provides a 2-year limited warranty.

86,000 HOURS

L85 LUMEN MAINTENANCE
LED Luminaires will reach 85% of initial lumen output at or beyond 86,000 hours at 25°C.



Vanguard™

FLUSH RACEWAY ILLUMINATED DISPLAY

ORDERING INFORMATION

Example: 1000BK-3-100-B

1000 Series, Black Faceplate, Flush Raceway, Standard Font Lens Graphic, Blue LED

1000BK		3		
PLATFORM				
Series	Faceplate Cover	Mounting	Lens Graphics	LED Colors
1000 1000 Series	BK Black ** Custom Colors on Special Order	3 Flush Raceway Mount	100 Standard Font (Arial only) 200 Special Font (Text only)* 300 Standard Information Signs 400 Special Graphic* (From factory) 500 Custom (Customer supplied art)	A Amber B Blue G Green R Red Y Yellow W White

* Consult factory for specific text & graphics details.

SYSTEM INTEGRATION ACCESSORIES

FLEX CABLE KIT		
	1000 CABLEKIT 3	3' Cable Kit
	1000 CABLEKIT 5	5' Cable Kit


POWER SUPPLIES		
	PWR-T010012/2	120V AC Input, 12V AC Output, 100W, 2 Circuit, Class II Magnetic Transformer, NEMA 3R Case
	PWR-T015012/2	120V AC Input, 12V AC Output, 150W, 3 Circuit, Class II Magnetic Transformer, NEMA 3R Case
	PWR-T025012/2	120V AC Input, 12V AC Output, 250W, 4 Circuit, Class II Magnetic Transformer, NEMA 3R Case

SURGE SUPPRESSION DEVICE Tempo furnished surge suppression device must be installed on each supplying branch circuit to comply with 5-year warranty		
	SSD-120	120V Branch Circuit
	SSD-277	277V Branch Circuit

Vanguard[™]

FLUSH RACEWAY ILLUMINATED DISPLAY

DIMENSIONAL INFORMATION

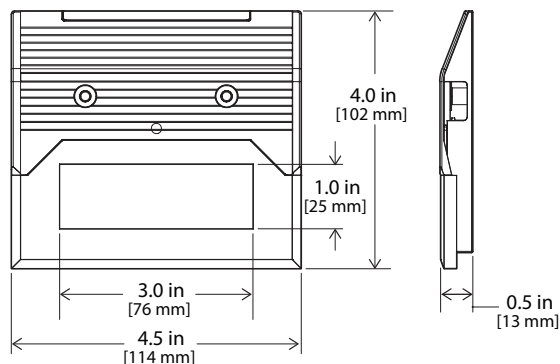

LENS GRAPHICS

GROUP 100 TEXT EXAMPLES – Arial Font Only



GROUP 300 GRAPHIC EXAMPLES – Standard Information Signs/Arial Font Only



GROUP 500 GRAPHIC EXAMPLES – Custom Graphic (Customer Supplied Art)



Tempo products and technologies are protected under one or more US and International patents.

Tempo reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program. Please consult www.tempolc.com for the most up-to-date specifications and technical data.