

## Vanguard<sup>™</sup>

### SURFACE MOUNT ILLUMINATED DISPLAY



#### APPLICATION

Tempo's Vanguard series of illuminated displays are attractive, low-profile and customizable. Constructed to withstand the most demanding environments, the Vanguard Series employs a tamper resistant, durable nonferrous cast housing, impact resistant cast acrylic lens and long lasting LED light sources. Available with a wide selection of standard lettering and/or graphics the Vanguard also offers six (6) standard LED light colors. Customization is available to incorporate different fonts and graphics.

With the ease and convenience of low voltage, class two wiring, the luminaire can be applied in any number of methods and does not require the expense of having the supply wires enclosed in electrical metallic tubing (EMT). Using only 0.3 watts per luminaire, the Vanguard Series from Tempo Industries is an attractive, durable and economical method of communication to patrons of your facility.

#### CONSTRUCTION

- Corrosion resistant die cast zinc housing
- Impact resistant cast acrylic lens
- Replaceable individual LED's
- Wide selection of standard graphics
- Custom graphics available

#### PERFORMANCE

- 0.3 watts per luminaire
- Operating temperature range of -20°C to 50°C

#### LIGHT CHARACTERISTICS


- LED colors available in Amber, Blue, Green, Red, Yellow and White

#### SUGGESTED COMPANION PRODUCTS

- LPS<sup>®</sup> and Guardian – Gray Stripe Step Nose extrusion
- LPS<sup>®</sup> – Raceway

#### SEE ALSO

- Vanguard Flush Carpet Mount Illuminated Display
- Vanguard Flush Raceway Illuminated Display



Buy Tempo  
Buy American




#### WARRANTY

Tempo provides a 2-year limited warranty.

#### 86,000 HOURS

**L85 LUMEN MAINTENANCE**  
LED Luminaires will reach 85% of initial lumen output at or beyond 86,000 hours at 25°C.

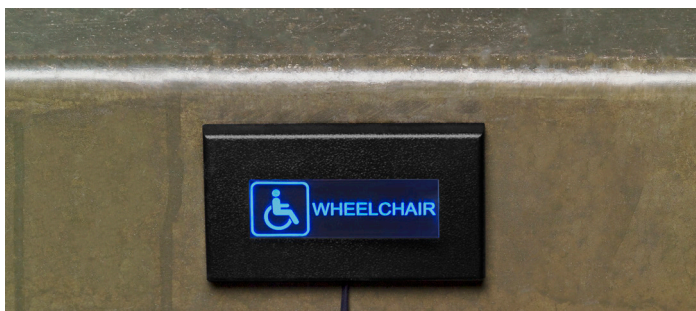

## Vanguard™

SURFACE MOUNT ILLUMINATED DISPLAY

### ORDERING INFORMATION

Example: 1000BK-1-100-B

1000 Series, Black Faceplate, Surface Mount, Standard Font Lens Graphic, Blue LED

<b>1000BK</b>		<b>1</b>		
<b>PLATFORM</b>				
<b>Series</b>	<b>Faceplate Cover</b>	<b>Mounting</b>	<b>Lens Graphics</b>	<b>LED Colors</b>
<b>1000</b> 1000 Series	<b>BK</b> Black  ** Custom Colors on Special Order	<b>1</b> Surface	<b>100</b> Standard Font (Arial only) <b>200</b> Special Font (Text only)* <b>300</b> Standard Information Signs <b>400</b> Special Graphic* (From factory) <b>500</b> Custom (Customer supplied art)	<b>A</b> Amber <b>B</b> Blue <b>G</b> Green <b>R</b> Red <b>Y</b> Yellow <b>W</b> White

\* Consult factory for specific text & graphics details.

### SYSTEM INTEGRATION ACCESSORIES

<b>FLEX CABLE KIT</b>	
<b>1000 CABLEKIT 3</b>	3' Cable Kit
<b>1000 CABLEKIT 5</b>	5' Cable Kit

<b>POWER SUPPLIES</b>	
<b>PWR-T010012/2</b>	120V AC Input, 12V AC Output, 100W, 2 Circuit, Class II Magnetic Transformer, NEMA 3R Case
<b>PWR-T015012/2</b>	120V AC Input, 12V AC Output, 150W, 3 Circuit, Class II Magnetic Transformer, NEMA 3R Case
<b>PWR-T025012/2</b>	120V AC Input, 12V AC Output, 250W, 4 Circuit, Class II Magnetic Transformer, NEMA 3R Case


  

<b>SURGE SUPPRESSION DEVICE</b> Tempo furnished surge suppression device must be installed on each supplying branch circuit to comply with 5-year warranty	
<b>SSD-120</b>	120V Branch Circuit
<b>SSD-277</b>	277V Branch Circuit

## Vanguard<sup>™</sup>

SURFACE MOUNT ILLUMINATED DISPLAY

### DIMENSIONAL INFORMATION

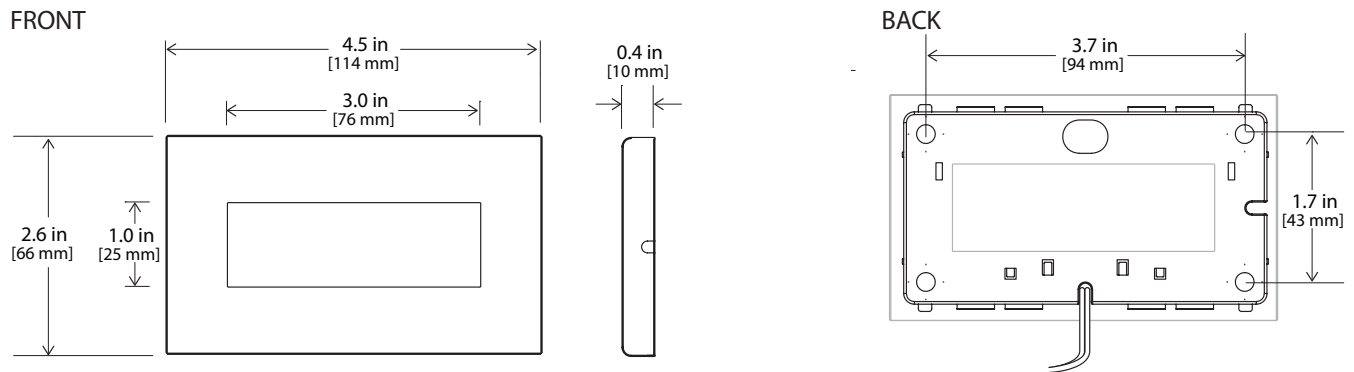

### LENS GRAPHICS

GROUP 100 TEXT EXAMPLES – Arial Font Only



GROUP 300 GRAPHIC EXAMPLES – Standard Information Signs/Arial Font Only



GROUP 500 GRAPHIC EXAMPLES – Custom Graphic (Customer Supplied Art)



Tempo products and technologies are protected under one or more US and International patents.

Tempo reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program. Please consult [www.tempollc.com](http://www.tempollc.com) for the most up-to-date specifications and technical data.