


Linear Series - Void 0

CABLE SUSPENDED

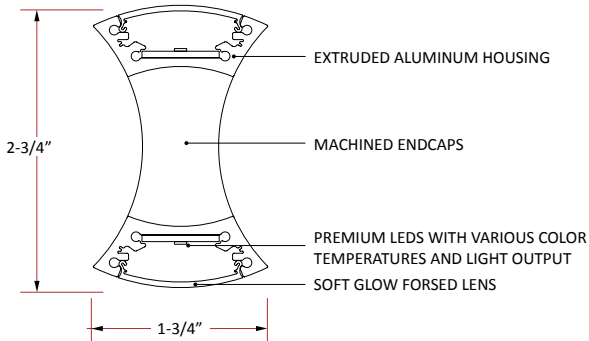

FEATURES:

- Powered Suspension System - No power cord
- High transmission frosted lenses with no diode imaging
- No visible fasteners
- Extruded aluminum housing
- Dimmable/Programmable drivers for controllable light output
- High efficacy LEDs with 5 year warranty
- Under 2 steps MacAdams Ellipse Binning
- 5/16" thick machined end caps
- Bi-directional fixture

NOTES:

REQUIRES REMOTE DRIVER(S) (see page 3 for more info)



NOTE: ALL ITALICIZED OPTIONS MAY INCREASE LEAD TIME. PLEASE CONSULT FACTORY WITH QUESTIONS.

FITURE TYPE	MOUNTING/ ORIENTATION	NOMINAL LENGTH*	COLOR TEMP	LED DRIVE		VOLTAGE	DRIVER	HOUSING FINISH
				DIRECT	INDIRECT			
LS-VOD-0	CS Cable Suspended - BI-DIRECTIONAL	1' 1'-3/8"	27K 2700K	VLO Very Low Output	VLO Very Low Output	UNV Universal (120-277v)	ND Non-Dimming 0-10v DIMMING	SC Satin Clear Anodize (Standard)
	CSV Cable Suspended - VERTICAL	2' 2'-3/8"	30K 3000K	LO Low Output	LO Low Output			
		3' 3'-3/8"	35K 3500K	SO Standard Output	SO Standard Output	2V 227v	1D 1% DIM LUTRON	MB Matte Black (Powder Coat)
		4' 4'-3/8"	40K 4000K	HO High Output	HO High Output	3V 347v*	LTEA Lutron Hi-Lume 1% (2-Wire)	CF Custom Finish* (Consult Factory)
		CR ___' Continuous Run (Specify length in nominal feet)	50K 5000K	VHO Very High Output	VHO Very High Output		LDE1 Lutron EcoSystem 1% "Soft on" (Digital)	
				CPO Custom Power Output Consult factory	CPO Custom Power Output Consult factory		LDES Lutron EcoSystem 5% 5-Series (Digital) DALI	
							DALI Digital Addressable Lighting Interface	

*Dimensions are for reference only. Contact factory for more specific information or shop drawings.
**Odd lengths may incur slightly higher per foot pricing.

*Not all dimming options are available with 347v.

*RAL and color match are available.

END CAP DETAIL FINISH	DRIVER HOUSING FINISH	CANOPY SIZE OPTIONS*	CANOPY FINISH	POWER CORD COLOR	AIRCRAFT CABLE LENGTH*	OPTIONS/ CUSTOMIZATION*
MF Machined Finish (Standard) CF Custom Finish (Consult Factory)	MA Mill Aluminum* SC Satin Clear SW Satin White SB Satin Black CF Custom Finish (Consult Factory)	5 SERIES CANOPY 55 5" Power feed canopy 5" Non-power feed canopy (NOTE: The 55 option is only available with single fixtures.)	SW Satin White (Standard) CPC Custom Powder Coat Canopy Finish*	PSS Power Suspension System (No Power Cord) CC Custom Cord*	2 2' 4 4' 6 6' 8 8' CL Custom Length** (Specify in feet IE: CL10 for 10')	EMB7 7 Watt battery back-up** (Approximately 600 lumens) EMB12 12 Watt battery back-up** (Approximately 1,000 lumens) 90 90+ CRI LED BOARDS CCP Corners/patterns* CD Custom Driver* CR Customization Requested*
		4 SERIES CANOPY 44 4" Power feed canopy 4" Non-power feed canopy	MF Machine Finish (Standard) SW Satin White CF Custom Finish*			

NOTE: MF option is strongly recommended. Other options will result in higher costs and potentially longer lead times.

*Most cost effective.

*CONTINUOUS RUNS REQUIRE THE 44" OPTION. CONSULT FACTORY WITH QUESTIONS.
*See options section and installation instructions for more information.

*Consult the factory.

*Cables are field adjustable.
** Consult factory to confirm specific length.

NOTE: Customization may incur higher costs and/or increased lead times.
*Consult the factory for all custom options or custom concept requests.
**The EMB12 is slightly more expensive than the EMB7 option (BOTH OPTIONS ARE REMOTE ONLY).

GENERAL NOTES:

All fixtures are **UL listed** for **dry** and **damp** locations.

REMOTE DRIVER for all options.

Please contact the factory with any specification questions.

Italicized out options may incur additional costs and/or extended lead times. Please consult the factory.

FIXTURE ORIENTATION:

Bi-directional (CS) for downlight and uplight applications.

DRIVER: [REMOTE]

1) NON-DIMMING: As described... this fixture will not dim.

2) DIMMING: 0-10v: 1%, 10% :: Lutron: 2-wire Forward phase (Hi-Lume 1%), Ecosystem to 1% (Soft On), Ecosystem to 5% (5 Series).
"DALI" - Specify driver. See "Dimming Options" on subsequent pages for more information. For other dimming options, consult the factory.

3) EMERGENCY: Specify EMB under the Options/Customization category at the end of the cut sheet along with the desired lumen output (600 or 1,000 lumens - the latter is slightly more costly).

4) Drivers are programmed according to our standard lumen packages or to custom watt/lumen package requirements.

5) Consult factory with any questions or specification requirements.

FINISHES:

The standard finish is a Satin Clear anodized housing with Machine Finished hardware. Machined finish is preferable for machined components (Hardware Detail) - Powder coating these parts may result in additional costs. Consult the factory with any questions about standard or custom finishing options.

CUSTOMIZATION:

We have numerous custom options available. However, if there is something unique required for a project, from simple options to complete custom requests, we are more than willing to entertain any creative notions you might have. Just ask.



Linear Series - Void 0

PRODUCT SPECIFICATION

- Fixture delivered light potential: 101 Lumens/Watt*
- Uniform light distribution
- 90+ CRI LED diode options
- Exceptional binning- less than 2 step MacAdams Ellipse
- Minimum 70% initial lumen output at 70,000 hours
- Standard 0-10v dimming to %10
- Lutron, Eldoled, Dali, and other dimming options
- 5 year system warranty

*Actual fixture efficacy will be dependent on specification. Higher lumens per watt are achieved with lower drive powers. Please contact the factory with questions or for more information.

LUMEN OUTPUT*

DRIVER OUTPUT	LUMEN OUTPUT (PER FOOT)	
	WATTAGE	LUMENS
VERY LOW (VLO)	7.5	800
LOW (LO)	11.5	1,210
STANDARD (SO)	16	1,585
HIGH (HO)	19.5	1,985
VERY HIGH (VHO)	23.5	2,310

DRIVER OUTPUT	PER 4' FIXTURE (TOTAL DELIVERED LUMENS)	
	WATTAGE	LUMENS
VERY LOW (VLO)	30	3,200
LOW (LO)	46	4,840
STANDARD (SO)	64	6,340
HIGH (HO)	78	7,940
VERY HIGH (VHO)	94	9,240

VERY LOW: Considerably underdrives the LEDs to maximize fixture efficacy potential and limit wattage use.

LOW: Underdrives the LEDs for reasonable light output while maintaining low wattage use.


STANDARD: Drives the LEDs for the best combination of lumen output and fixture efficacy.

HIGH: Drive the LEDs at higher capacity for higher lumen output with good efficacy.

VERY HIGH: Drives the LEDs at the highest capacity for the highest lumen output with the best efficacy.

*Lumen output will vary depending on ambient temperature. Cooler ambient and LED color temperatures result in higher luminaire performance. Calculations are based on 4000K LEDs.

LUMINOUS INTENSITY DISTRIBUTION

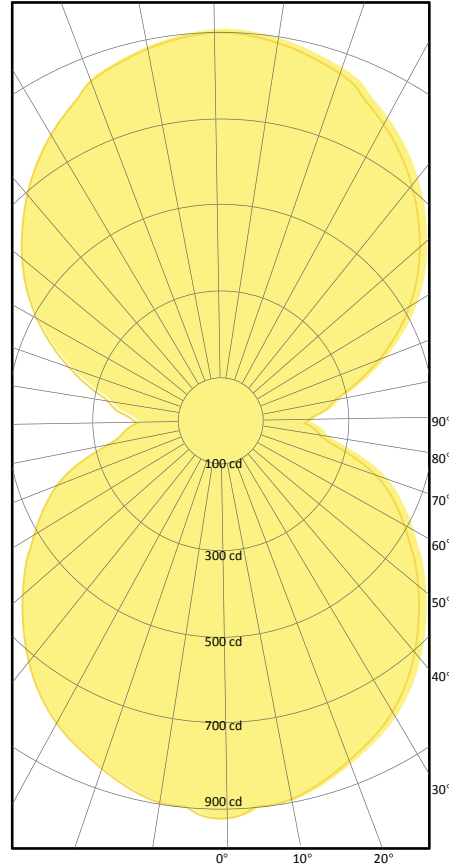

FIXTURE PROPERTIES (AS TESTED)

- 4' nominal length fixture
- Standard Output (SO)
- Total system energy consumption: 64 Watt
- 101 Lumens/Watt
- 4000K 80 CRI LED



ZONAL LUMEN SUMMARY

ZONE	LUMEN	%LAMP	%FIXTURE
0 - 30	708	8.2%	11.2%
0 - 40	1,168	13.5%	18.4%
0 - 60	2,157	25%	34%
0 - 90	3,171	36.7%	50%
90 - 120	1,012	11.7%	16%
90 - 150	2,463	28.5%	38.8%
90 - 180	3,170	36.7%	50%
0 - 180	6,341	73.4%	100%

Linear Series - Void 0

REMOTE DRIVER HOUSING SIZES


The driver housing length is typically dictated by the options selected. Standard driver housing lengths are as shown. Non standard driver requests may increase or decrease the driver housing length. Specifications are subject to change without notice. Consult factory with questions, requests, or size limitations and we will do our best to accommodate your needs.

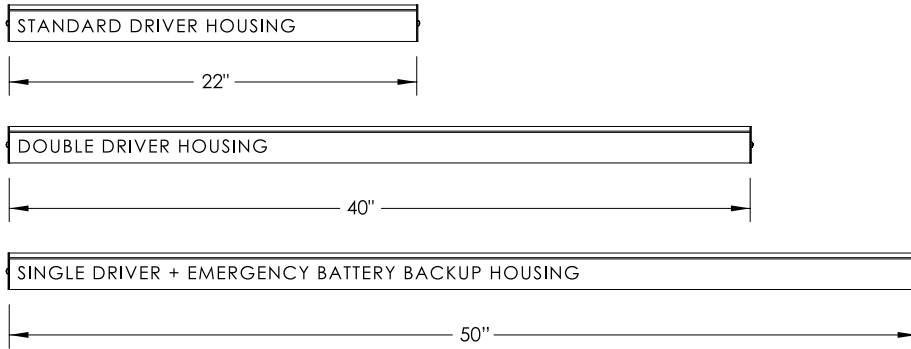


INSTRUCTIONS

See below for lid removal and installation instructions.

To remove the driver housing lid, use a broad slot screwdriver in the channel as shown here and twist the screwdriver ninety degrees. This may need to be done at both ends of the housing or multiple locations depending on the driver housing length.

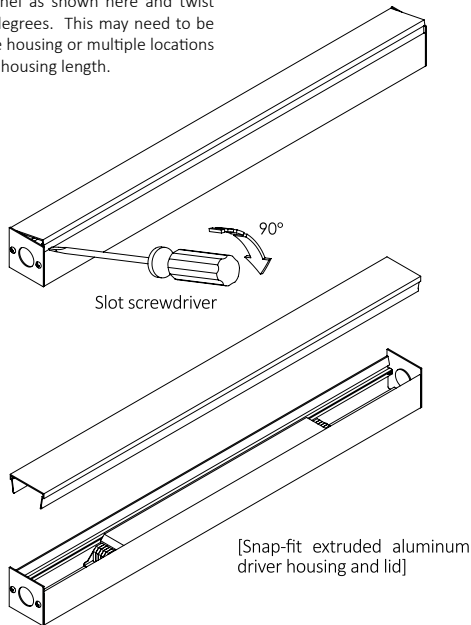

1) Drill mounting holes in the driver housing as needed to secure to a suitable surface. (If needed, a power feed hole can be drilled into the bottom of the housing for certain mounting/power feed applications).

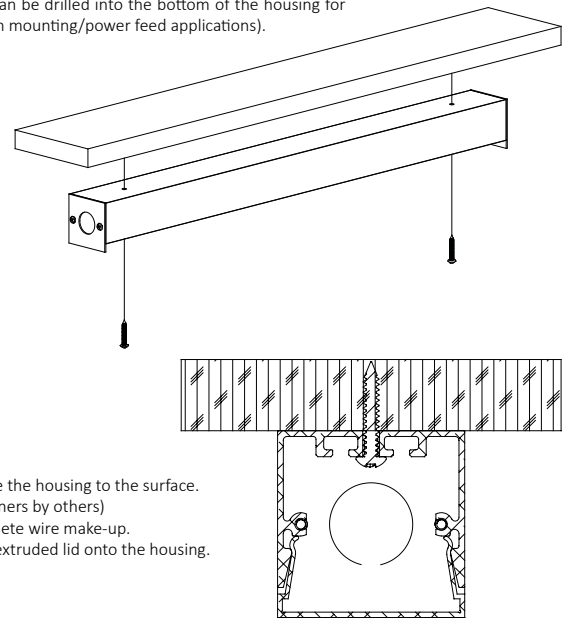


FINISHES

Mill Aluminum (MA) is the standard finish. Satin White and Satin Black powder coat and Satin Clear anodized finishes can be done for a small charge. Custom finishes are possible. Contact the factory for specific finish options, specific requests, RAL colors, or any other questions.



Mill Aluminum (MA)
[Standard Finish]



Satin White (SW)
[Upgrade Finish]



Satin Black (SB)
[Upgrade Finish]



Satin Clear (SC)
[Upgrade Finish]



Custom Finish (CF)
[Upgrade Finish]



NOTES

Linear Series - Void 0

PROJECT _____

TYPE _____



CABLE SUSPENDED (CS)

Power Suspension System. Carbon 0 (C0) can only be static down-light and up-light: Bi-Directional, Vertical (CSV), or Rotational (see below). Standard and custom power cord finishes, sleeve options, and canopy colors offer options to match almost any space. Stainless steel cables come in various lengths (4' is standard) and are field adjustable.


Linear Series - Void 0

CONTINUOUS RUN

Continuous runs are available with all fixtures and have several connection options. Single Seam continuous run options offer smooth section transitions while Component Seams lend to a more dramatic visual statement. The 360 Rotational option enables individual sections to rotate independently of each other, which offers adjustable asymmetric light distribution capacity along with striking appearances such as alternating up/down fixtures or spiral transitions. The flexibility within the rotational option makes for infinite design and functional possibilities.



CONTINUOUS RUN
SINGLE SEAM

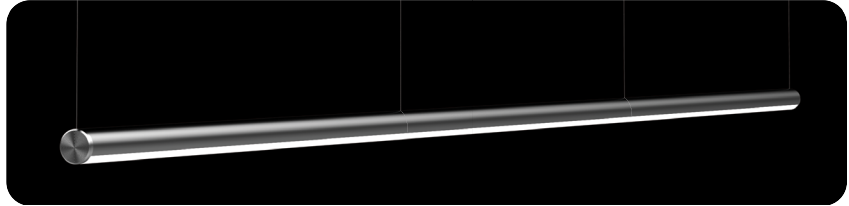

FIXTURE WITH SINGLE SEAM CONTINUOUS RUN

CANOPIES

STANDARD

Canopies have several standard options to suit various environment aesthetics. The standard cable suspension system has 5" Satin White canopies. However, other standard options include a 2" non-power feed canopy option as well as no canopy at all. Both of these include a 5" diameter power feed canopy.

55



5" diameter power feed and 5" diameter non-pow feed canopy. Most common canopy layout. Creates a consistent ceiling aesthetic.

52



5" diameter power feed and 2" diameter non-power feed canopy. Offers a more minimal ceiling treatment while maintaining the ability to cover up mistakes. Requires a 1/4-20 stud securely fastened to the ceiling.

50




5" diameter power feed canopy and no canopy on the non-power feed side. Minimal aesthetic. Requires a 1/4-20 stud securely attached to ceiling. Works well with continuous runs where the power can be carried inside the fixture.

MACHINED

Machined canopies are 4" in diameter and can be anodized as well as powder coated to match a desired color or they can be left with a mill finish for a more striking look. Similar non-power feed options are available with this aesthetic as well. These options do carry a higher cost than standard canopies, but also have an impressive appearance.

44

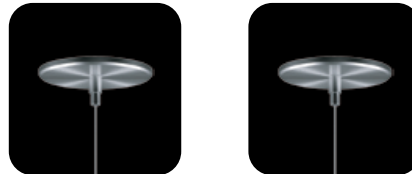

4" diameter machined power feed and 4" diameter machined non-power feed canopy. Offers a consistent ceiling aesthetic with smaller machined canopies. Mill, anodized, and powder coat finishes available.

41



4" diameter machined power feed and 1-1/4" diameter machined non-power feed canopy. Offers minimal ceiling treatment while maintaining the ability to cover mistakes. Requires a 1/4-20 stud securely fastened to the ceiling. Mill, anodized, and powder coat finishes available.

40



4" diameter machined power feed canopy and no canopy on the non-power feed side. Minimal aesthetic. Requires a 1/4-20 stud securely attached to the ceiling. Works well with continuous runs where the power can be carried inside the fixture. Mill, anodized, and powder coat finishes available.

CUSTOM

Custom canopy options are available and can look spectacular in certain applications. Contact the factory with all custom requests or with any questions.



CUSTOM POWDER COAT



CUSTOM ANODIZE



CUSTOM SHAPE

Linear Series - Void 0


COLOR AND FINISH

Standard finish configurations are Satin Clear (SC) housing with Machined Finish (MF) machined components (end caps, knuckles, cover plates, etc.). The incredibly clean detail within all of the machined components lends to an incredibly high end aesthetic with two tone finish. Numerous custom anodizing and powder coated finishes are available as well. If you have a particular color/finish treatment in mind, please contact the factory and we will do our best to accommodate your project needs.

STANDARD



SATIN CLEAR
ANODIZING



MACHINED
COMPONENTS

CUSTOM



MATTE BLACK



GLOSS BLACK



BRONZE



MILL ALUMINUM



SPECULAR



SATIN WHITE



GLOSS WHITE



COLOR POWDER COAT



COLOR ANODIZE



RAL COLORS